

Applications



1. CMOS and MOSFET protection from ESD
2. Computer ESD and I/O protection
3. Telecommunication transient protection
 - USD 2.0 port, IEEE-1394, RF module, antenna circuit , high speed protocol etc.



Features

1. Excellent ESD clamping & small insertion loss
2. High transient current capability, fastest response time
3. Capacitance is designed to ultra-low value, which can be efficiently suitable to high speed data line.
4. EU-RoHS Compliance

How to Order:

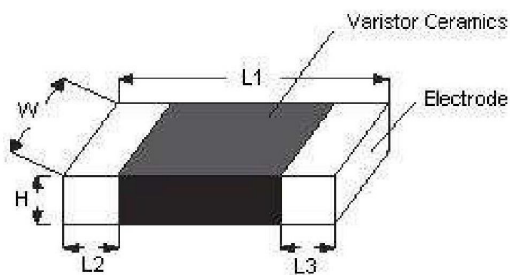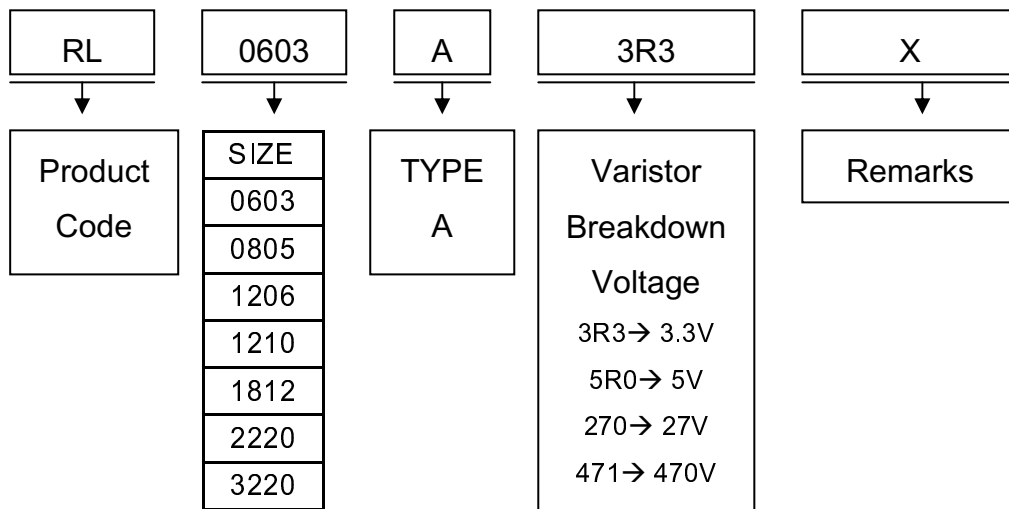

Size: mm


SIZE	L1	W	H	L2 & L3
0603	1.60±0.15	0.80±0.15	0.95	0.35±0.15
0805	2.00±0.15	1.25±0.20	1.20	0.40±0.20
1206	3.20±0.30	1.60±0.20	1.50	0.50±0.20
1210	3.20±0.30	2.50±0.25	1.50	0.50±0.20
1812	4.50±0.40	3.20±0.30	1.50	0.60±0.30
2220	5.70±0.40	5.00±0.30	2.00	0.60±0.30
3220	8.10±0.30	5.00±0.30	3.00	0.80±0.30

Electrical Characteristics (@TA=25°C Unless Otherwise Noted)

Size						P/N	Working Voltage		Break down Voltage		Peak Current	Clamping Voltage		
							AC	DC	@1mA DC		8/20us	8/20us		
							Vrms	VDC	VB		Ip(Max)	VC	A	
0603	0805					RL****A3R3K	1.4	2	3.3	2.6-4.0	0603 10A-30A	9	1	
						RL****A5R0K	2.4	3.3	5	4.0-6.0		12	1	
						RL****A8R0K	4	5.5	8	6.6-9.9		14	1	
						RL****A120K	7	9	12	10-15.5		24	1	
						RL****A180K	11	14	18	15-20.5		30	1-10	
		1206					RL****A210K	12	16	21	17-24	0805 60A-100A	35	1-10
							RL****A240K	14	18	24	22-27		38	1-10
							RL****A270K	17	22	27	24-30		42	1-10
							RL****A300K	19	24	30	27-33		47	1-10
							RL****A330K	20	26	33	29-36		54	1-10
	1210					RL****A370K	21	27	37	33-40.5	1206 80A-150A	60	1-10	
						RL****A390K	24	30	39	35-42		65	1-10	
						RL****A470K	28	36	47	42.52.5		77	1-10	
						RL****A530K	30	42	53	47-58.5		85	1-10	
						RL****A560K	35	45	56	51-62		90	1-10	
						RL****A600K	36	47	60	53-66		98	1-10	
						RL****A680K	40	56	68	61-75		110	1-10	
						RL****A760K	45	60	76	68-84		120	1-10	
						RL****A820K	50	65	82	74-92		135	1-10	
						RL****A900K	52	68	90	80-100		150	1-10	
	1812					RL****A101K	60	85	100	90-110	2220 400A-800A	165	2.5-10	
						RL****A121K	75	100	120	108-132		200	2.5-10	
						RL****A151K	95	125	150	135-165		250	2.5-10	
						RL****A181K	115	150	180	162-198		300	5-10	
						RL****A201K	130	170	205	184-225		340	5-10	
						RL****A221K	140	180	220	198-242		360	5-10	
						RL****A241K	150	200	240	216-264		395	5-10	
						RL****A271K	175	225	270	243-297		455	5-10	
						RL****A361K	230	300	360	324-396		595	5-10	
						RL****A391K	250	320	390	351-429		650	5-10	
	2220					RL****A431K	275	350	430	387-473	3220 500A-800A	710	5-10	
						RL****A471K	300	385	470	423-517		775	5-10	

All data is subject to change, please visit our website at <http://www.shin-hang.com.tw> for updates.

Electrical Rating

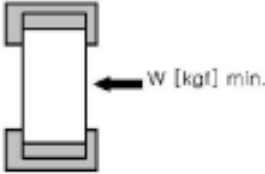NO	ITEM	Requirements	Test Method
1	Operation Range	-40°C - 85°C	
2	Leakage Current	Satisfaction to the specification, under 1uA	Applied voltage: specified working woltage
3	Capacitance	Satisfaction to the specification ,under 1pF	Frequency & OSC level: 1MHz, 1.0 Vrms
4	Solderability	More than 90% of the terminal electrode shall be covered with new solder	1. Type of solder: H63A 2. Soldering Temp & Time: 230 ± 5°C, 5±1 sec
5	Reflow soldering	1. No serious mechanical damage 2. More than 50% of the terminal electrode shall be covered with new solder 3. Leakage current: ≤ 10uA	1. Type of solder: H63A 2. Temp &Time: Max 260±5°C, min 10 sec
6	Humidity Load Test	1. No Serious mechanical damage 2. Leakage Current: ≤ 10uA	Test Temp. & relative humidity & Time: 85±5°C RH, Vw applied, 500±12hrs
7	Thermal Shock		1. Step 1: -40 ±5°C, Step 2: 85 ±5°C 2. Cycle: 30min ±3min, each 5 cycles
8	High Temp. Test		Temp. & time: 85 ±5°C, 1000± 24hrs
9	Adhesive strength	No serious mechanical damage under condition of 1005: min 0.5kgf, 1608: min 1.0kgf	
10	ESD	1. No mechanical damage after test 2. Leakage Current: ≤ 10uA * ESD gun(IE61000-4-2 standard) * C=150pF R=330Ω	1. Contact discharge * Voltage: ±8KV(Level 4) * Number: 10 times in 10 sec 2. Air discharge * Voltage: ±15KV(Level 4) * Number: 10 times in 10 sec